

FEEDTRONIC 5005

Feedtronic 5005 is a precise electronic silo weighing system especially designed to give restrictive feeding in breeder and pullet houses where precise restrictive feed control is a must.

The unit can operate two separate feed augers from two different silos in order to distribute feed to separate male and female hoppers.




Feedtronic 5005 can distribute different quantities of up to 15 different hoppers.

- * Feedtronic 5005 5 for up to 5 hoppers.
- * Feedtronic 5005 15 for up to 15 hoppers.

Feedtronic can operate the male and female feeders according to the Feedtronic real time clock.

Can be connected to a central PC.

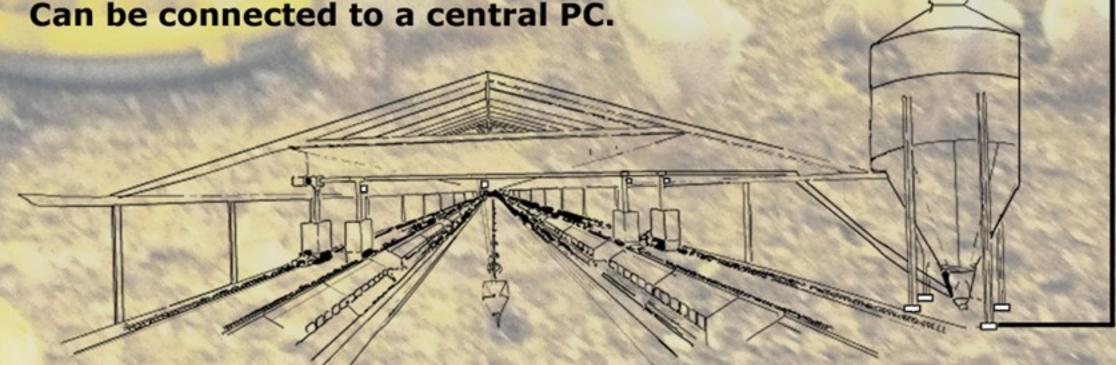



Feedtronic 5005 is a precise, easy to operate user friendly silo weighing system. Its simple installation makes it ideal for restrictive feeding. It is possible to connect the device to up to 2- 4 or 6 legged silos.

Feedtronic 5005 displays the amount of feed in each silo separately and can give up to 64 different restrictive quantities.

Displays the daily and total quantity of feed per hopper, and total feed consumption of the entire flock.

Has a battery backup memory in case of a power failure.

In case of malfunction or an empty silo the device will stop the auger motor and activate an alarm.

The unit has an internal calibration program which displays all the information that can be changed by the keyboard.

Feedtronic 5005 can activate the feeder according to its preset real time clock and timers for up to 8 times in 24 hours.

Can connect to a PC for central management via the Web Chick software.



Load cell with mounting bracket

TECHNICAL SPECIFICATIONS:

POWER: 220V

MAXIMUM LOAD ON 4 LEGS: 20 TONS [40000 POUNDS]
MAXIMUM LOAD ON 6 LEGS: 30 TONS [60000 POUNDS]

ACCURACY: Better than 0.1%

RESOLUTION: 1 kg/Lb

LOAD CELL: 5000 kg/1000 Lb

TEMPERATURE COMPENSATED: -10 to +40°C

ENVIRONMENTAL PROTECTION: 67 LP

IN AND OUTPUT: RS 422

DISPLAY: ALPHA NUMERIC 2 X 16

BACKUP BATTERY: 10 Years